

Model: C8D5 (X-Series)
Frequency: 50
Fuel Type: Diesel

» Generator set data sheet



Our energy working for you.™

Spec sheet:	SS23-CPGK
Noise data sheet (Open/enclosed):	ND50-OS550 / ND50-CS550
Airflow data sheet:	AF50-550
Derate data sheet (Open/enclosed):	DD50-OS550 / DD50-CS550
Transient data sheet:	TD50-550

Fuel consumption	Standby				Prime			
	kVA (kW)				kVA (kW)			
Ratings	8.3 (6.6)				7.5 (6)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
gph	0.3	0.4	0.5	0.6	0.3	0.4	0.5	0.6
L/hr	1.54	1.87	2.31	2.86	1.40	1.70	2.10	2.60

Engine	Standby rating		Prime rating
Engine manufacturer	Cummins		
Engine model	X1.3G2		
Configuration	4 Cycle; In-line; 2 Cylinder Diesel		
Aspiration	Naturally Aspirated		
Gross engine power output, kWm	11.8	10.6	
BMEP at set rated load, kPa	711	672	
Bore, mm	95		
Stroke, mm	91		
Rated speed, rpm	1500		
Piston speed, m/s	4.55		
Compression ratio	18.5:1		
Lube oil capacity, L	4.5		
Overspeed limit, rpm	2050		
Regenerative power, kW	2		
Governor type	Electronic		
Starting voltage	12 Volts DC		

Fuel flow	
Maximum fuel flow, L/hr	40
Maximum fuel inlet restriction, mm Hg	73
Maximum fuel inlet temperature (°C)	60

Air	
Combustion air, m³/min	11.60
Maximum air cleaner restriction, kPa	3.73 (HD clean element)

Exhaust	Standby rating	Prime rating
Exhaust gas flow at set rated load, m ³ /min	12.19	12.19
Exhaust gas temperature, °C	550	530
Maximum exhaust back pressure, kPa	4.133	

Standard set-mounted radiator cooling		
Ambient design, °C	50	
Fan load, KW _m	<1	
Coolant capacity (with radiator), L	4.65	
Cooling system air flow, m3/sec @ 12.7mmH2O	0.388	
Total heat rejection, BTU/min	7.5 (to coolant)	7.5 (to coolant)
Maximum cooling air flow static restriction mmH2O	0.125	

Open set derating factors kVA (kW)

Note: Standard open genset options running at 400V, 150m above sea level. For enclosed product derates, please refer to datasheet - DD50-CS550.

	27 °C	40 °C	45 °C	50 °C	55 °C
Standby	10 (8)	9.6 (7.68)	9.4 (7.52)	9.2 (7.36)	9 (7.2)
Prime	9.4 (8)	9.4 (7.5)	9.4 (7.5)	9.4 (7.5)	8.6 (6.9)


Weights*	Open	Enclosed
Unit dry weight kgs	N/A	RTF
Unit wet weight kgs	N/A	596

* Weights represent a set with standard features. See outline drawing for weights of other configurations


Dimensions	Length	Width	Height
Standard open set dimensions	N/A	N/A	N/A
Enclosed set standard dimensions	1460	850	1130

Genset outline

Open set

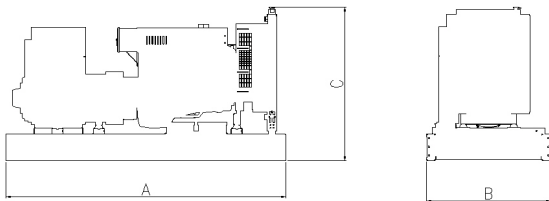

Enclosed set

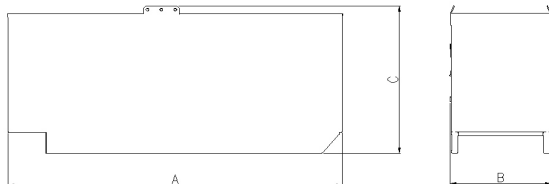

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

Feature code	Connection ¹	Temp rise degrees C	Duty ²	Alternator	Voltage
-	1 Phase	150/125C	S/P	PI044F	230
-	3 Phase	150/125C	S/P	PI044D	415

Ratings definitions

Emergency Standby Power (ESP)	Limited-Time running Power (LTP):	Prime Power (PRP)	Base Load (Continuous) Power (COP)
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Formulas for calculating full load currents:

Three phase output

$$\frac{kW \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{kW \times \text{Single Phase Factor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0) 1843 255000
 Fax: +44 (0) 1843 255902
 E-Mail: cpg.uk@cummins.com
 Web: www.cumminspower.com

©2009 | Cummins Power Generation Inc. | All rights reserved | Specifications subject to change without notice | Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others.

